






BUTTON DIMMER CONTROLLERS



1 GANG

SQUARE
ARCHITRAVE
CIRCULAR




2 GANG


SQUARE
HORIZONTAL

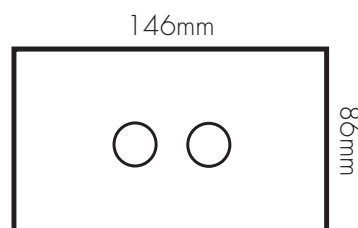

3 GANG

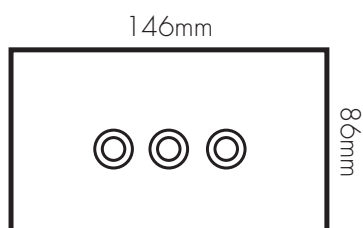

4 GANG

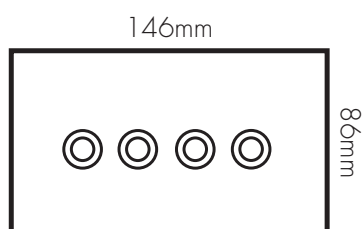



Button Dimmer

Standards, Approvals & Directives

Button dimmer Conforms to BS EN 60669 - 1: 1999 when assembled to appropriate plate and grid and installed correctly.

ASTA Certificate No: 16240

Description:

Button dimmers are manufactured from brass and finished to complement or match the cover plates.

Features:

- Solid Brass button
- All products clearly printed with BSNo's, ratings, etc
- Contact-closure momentary switch
- Button dimmers are screwed to appropriate grids.

Finishes:

Button available with our complete range of plate finishes: Unlacquered Brass, Antique Bronze, Stainless Steel, Polished Nickel, Verdigris and Invisible.

	Bell Push
Voltage Rating:	250V AC, 50Hz
Current Rating:	4A
Operating Temperature:	-5°C to + 40°C
IP Rating:	IP2XD
Max. Installation Altitude:	2000 Meters
No. of Operations:	40,000
Terminal Capacities:	3 x 1mm (Flex) 2 x 1mm (Solid) 2 x 1.5mm (Solid) 1 x 2mm (Solid) 1 x 2.5mm (Solid)